


# FLATIRON STEEL

## BOARD & BATTEN

### MATERIAL SPECIFICATIONS

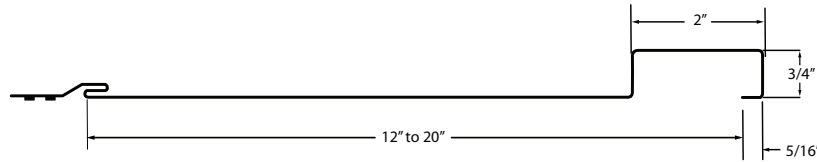

#### Available Widths:

12", 16" and 20"

16" (Standard) 12" and 20" (Specialized)

**Available Gauges:** 24 & 26 (Special Order)

**Weight:** 1.00lbs/SqFt (24), .75lbs/SqFt (26)

**Substrate:** AZ-50, Grade D, 50,000ksi

**Available Materials:** Painted, Galvalume, Bonderized<sup>®</sup>, 16 & 20 oz Copper

**Paint Systems:** Durapon70<sup>™</sup> PVDF, ULTRA CLAD<sup>™</sup> Kynar500<sup>®</sup>/Hylar5000<sup>®</sup> Valspar Fluoropon<sup>®</sup>

**Warranties:** Durapon70<sup>™</sup> PVDF – 35 year  
ULTRA-CLAD<sup>™</sup> - 35 year  
Zincalume<sup>®</sup> AZ50 – 20 year  
Valspar<sup>™</sup> PVDF - 35 year

**Production Options:** Either factory made to length with protective film to ensure damage free transport or rolled to length on site\*

\*\*On site production is subject to order minimums\*\*

**Panel Options:** Flat panel, striations, Pencil Ribs or Bead Roll (flat panel requires a waiver).

**Installation:** Can be installed on solid wood decking.

**Minimum Slope:** Wall Mount Only

#### Specifications for:

- Class 4 Hail Impact
- Class A Fire Rating

**Please Note:** It is the responsibility of the builder to ensure that they are compliant with current building codes.

Refer to Trim Pamphlet for Material Availability




Roofing • Siding • Manufacturer • Supplier

### APPLICATION DETAILS



\*Fastener Spacing 2' on Center

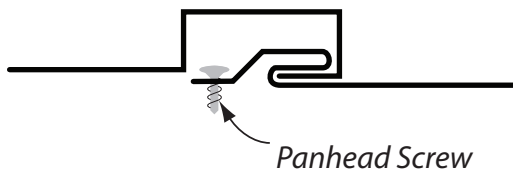

\*\*Oil Canning is not a reason for rejection of panels\*\*

\*\*Flatiron Steel is neither partially or soley responsible for improper installation or defects as a result of installation\*\*