




New!

FLEXPRO

BETTER

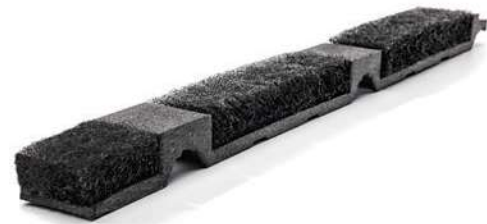

LP2 RIDGE VENT

BEST



Marco's newest innovation: a profile-cut stick or roll product designed to fit most roof panels.

- Won't absorb moisture, which can freeze and block all ventilation
- 2 beads of M63 Marco proprietary adhesive for superior hold
- Easy, one-person installation
- 40 year limited warranty
- ASTM testing: D1929, D737
- Available in box or roll quantities

FLEXPRO™

Marco's new FlexPro offers a balanced combination of outstanding features from our superior LP2 and economical Flex-O-Vent products. Made with Marco's unique polyester fiber, FlexPro delivers durable, long-lasting performance.

Specs

Net Free Area: FlexPro Panel Fit - 1-1/8" free-standing product, NFA 26 sq. in.*

Available In: 3' stick, 20' and 50' rolls

Air Permeability: >800 cubic feet per minute

Tear Strength: 3.5 ppi

Tensile Strength: 16 psi – Elongation 175%

Compressive Strength: 1.8 psi at 75%

*Effective Net Free Area varies based on product height, panel profile, and installation methods.



Our premier custom-cut vent strip includes Python™ polyester vent material inserts for a snug fit and optimum ventilation at a cost lower than traditional fans and louvers.

- Custom-cut profiles for snug fit
- Superior net-free ventilation reduces condensation
- 2 beads of M63 Marco proprietary adhesive for superior hold
- Easy, one-person installation
- Moisture and pest barrier
- 40 year limited warranty
- Non-obtrusive appearance
- Helps reduce utility costs
- ASTM testing: D1929, D737, D1294-86, D2261-83**
- Box quantity packaging



Our patented LP2 Ridge Vent is made from non-fabric-covered Python vent material. This durable, modified polyester is a non-woven, non-wicking, fiber-based matting. Its specially cut contours provide a custom, low-profile fit for any pitch and most major metal roof profiles. LP2 provides a superior net-free ventilation area that helps keep out moisture, pests and dust. Plus, LP2 can be installed by just one person in two easy steps. In fact, the screw bed and industrial strength peel-and-stick adhesive pre-applied to LP2 makes this one of the easiest installations imaginable.

Specs**

Net-Free Area: Varies with profile based on 17 square inches per linear foot of ventilation material

Dimensions: Varies with profile

Air Permeability: >760 cubic feet per minute

Cold Cracking: -25° F

Tear Strength: Machine 25 ppi / Counter 25 ppi

Compressive Strength: 1.8 psi at 75%

Rain: No leakage

