

NAIL STRIP




The Nail Strip panel system is a concealed fastener standing seam panel that offers easy installation for roofers and DIY homeowners alike.


MATERIAL SPECIFICATIONS



1" Nail Strip FF100


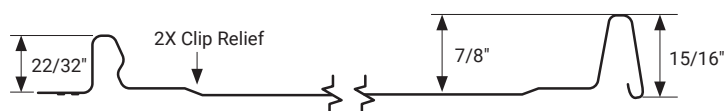


1½" Nail Strip FF150

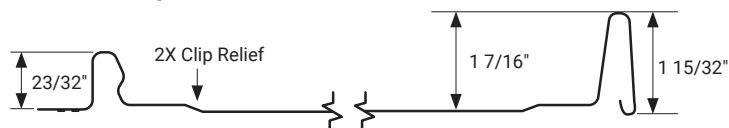

Nail Strip			
Available Widths	1" Nail Strip - 15.9" & (11.9", 19.9" Special Order) 1½" Nail Strip - 14.6" & (18.6" Special Order)	Panel Options	Flat panel, Striations, Pencil Ribs or Bead Roll (Flat panel requires a waiver)
Minimum Slope Requirement	3:12	Available Material Types	Painted, Galvalume Other finishes available upon request
Gauges	24 & 26 (Special Order)	Paint System	Valspar Fluoropon®
Weight	1.00lbs/SqFt (24) .75lbs/SqFt (26)	Warranty	Galvalume AZ50 – 25 year Valspar™ PVDF - 35 year
Substrate	AZ-50, Grade D, 50,000ksi	Installation	Should be installed on solid wood decking
Production Options	Either factory made to length with protective film to ensure damage free transport or rolled to length on site* **On site production is preferred and subject to order minimums**	Testing for 1.5" Nail Strip - UL 580 Wind Uplift (Class 90) - UL 2218 Class 4 Hail Impact - UL 790 Class A Fire Rating 	Notes: It is the responsibility of the builder to ensure that they are compliant with current building codes.

APPLICATION DETAILS

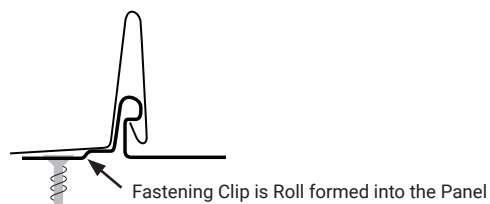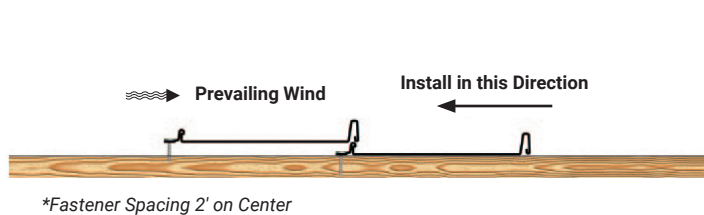

24 GAUGE ROOF AND WALL STANDARD COLOR SELECTION



Galvalume
NA



Frosty White
SR 0.85 | SR1 83



Spanish Stone
SR 0.33 | SR1 52



Sahara Tan
SR 0.38 | SRI 38



Military Bronze
SR 0.30 | SR1 27



Bison Brown
SR 0.28 | SR1 26



Smokehouse Bronze
SR 0.24 | SR1 23



Rebel Black
SR 0.28 | SRI 24



Stealth Gray
SR 0.15 | SR1 15



Granite Gray
SR 0.39 | SR1 33



Pine Green
SR 0.24 | SR1 22



Barn Red
SR 0.36 | SRI 19

WALL APPLICATION ONLY - 26GA



Antique Barnwood



Rough Cedar Gray

Check our websites for available additional prints.



****Flatiron Steel is neither partially or soley responsible for improper installation or defects as a result of installation****