



# FLATIRON STEEL

Roofing ▪ Siding ▪ Manufacturer ▪ Supplier



## COVERING WHAT MATTERS MOST

---


### TRIM SPECS

Board & Batten

# FLATIRON STEEL

## FLASHING DETAILS - BOARD & BATTEN

### PANEL PROFILE

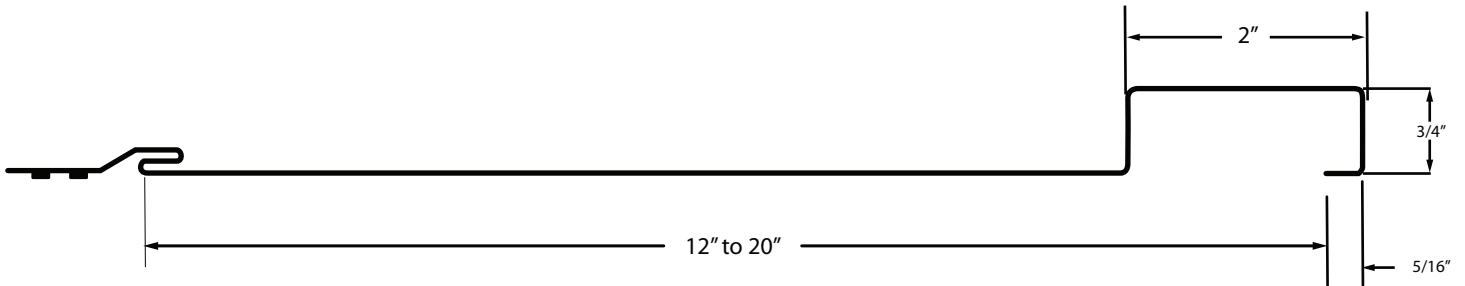

Board and Batten available Widths: 12", 16", 20"  
(16" Standard - 12" and 20" Special Order)

All trim specifications are designed to be used with Flatiron Steel Board and Batten

When needed, custom trim is available in all colors, 10'-0" length, and will be priced based upon the desired profiles girth (width before bending).

Material used for panels is manufactured in 24 and 26 gauge Painted, Galvalume, and Bonderized finishes and Pure Copper (16oz, 20oz).

Warranty information that's provided, should be used as a guideline. Complete limited warranty information is available upon request.



Roofing • Siding • Manufacturer • Supplier

- **COLORADO OWNED AND OPERATED FAMILY BUSINESS**
- **TOP NOTCH CUSTOMER SERVICE**
- **CUSTOM ORDERS \***
- **1-2 WEEK TURN AROUND TIME!**
- **NO MAINTENANCE**
- **12 COLORS TO CHOOSE FROM**
- **PLUS A HUGE SPECIAL ORDER OFFERING**

KYNAR 500® is a registered trademark of Arkema, Inc.  
HYLAR 5000® is a registered trademark of Solvay Solexis.  
GALVALUME® is a registered trademark of BEIC.  
ULTRA-Cool® is a registered trademark of BASF Corporation \*  
VALSPAR® is a registered trademark of Valspar  
DuraCoat® is a registered trademark of DuraCoat.

# FLATIRON STEEL

## FLASHING DETAILS - BOARD & BATTEN

### COIL SUPPLIERS

Contact Flatiron Steel to obtain color charts and samples.

#### Flatiron Steel **24 Gauge**

- Steel Yield Stress: 50,000ksi (Grade D)
- Substrate: AZ50
- Paint System: Valspar®- Fluoropon
- **35-Warranty**
- Weight: 1.00 lbs/sf.

#### Coated Metals Group (CMG) **24/26 Gauge**

- Steel Yield Stress: 50,000ksi (Grade D)
- Substrate: AZ50
- Paint System: Duracoat ULTRA-Clad® (Kynar 500®/Hylar 5000®)
- **35-Year Warranty**
- 26 Gauge available in certain colors.  
Call for availability.
- Weight: 1.00 lbs/sf. (24 Gauge)
- Weight: .75 lbs/sf. (26 Gauge)

#### Sheffield Metals Int. **24/26 Gauge**

- Steel Yield Stress: 50,000ksi (Grade D)
- Substrate: AZ50
- Paint System: Valspar®- Fluoropon
- **35-Year Warranty**
- 26 Gauge available in certain colors.  
Call for availability.
- Weight: 1.00 lbs/sf. (24 Gauge)
- Weight: .75 lbs/sf. (26 Gauge)

#### Drexel Metals **24 Gauge**

- Steel Yield Stress: 50,000ksi (Grade D)
- Substrate: AZ50
- Paint System: Valspar®- Fluoropon
- **35-Year Warranty**
- Weight: 1.00 lbs/sf. (24 Gauge)
- Weight: .75 lbs/sf. (26 Gauge)

#### Cold Rolled Weathering Steel (Flatiron Steel Inc.) **24 Gauge**

- Steel Yield Stress: 50,000ksi (Grade D)
- Untreated, Cold Rolled Steel
- **Warranty:** None (Typical Lifespan 30-60 years)
- Weight: 1.00 lbs/sf.
- \*Not a regular stocked item*

#### Copper (Flatiron Steel Inc.) **16/20 oz**

- Tensile Strength: 32-40,000psi
- Pure Copper
- **Warranty:** None
- Weight (16 oz): 1.0 lbs/SF (20 oz): 1.25 lbs/sf.
- \*Not a regular stocked item*

All weights listed are 24 Gauge.

#### Bonderized (Flatiron Steel Inc.) **24 Gauge**

- Weight: 1.00 lbs/sf.
- \*Not a regular stocked item*

#### Digital Prints

- Including:
  - Natural Rough Sawn Cedar
  - Gray Rough Sawn Cedar
- \*Please Inquire*



# FLATIRON STEEL


## FLASHING DETAILS - BOARD & BATTEN

### CONCEALED FASTENER TRIMS

---


#### I/S Corner Base Cleat (Any Color)

Item #	Girth	Length
FS300	13¼" S.O.	10'0"

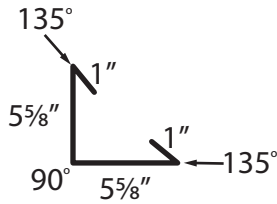


#### I/S Corner Cap

Item #	Girth	Length
FS301	12.75" S.O.	10'0"

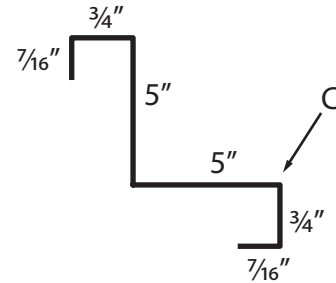


#### O/S Corner Base Cleat (Any Color)

Item #	Girth	Length
FS302	11" S.O.	10'0"

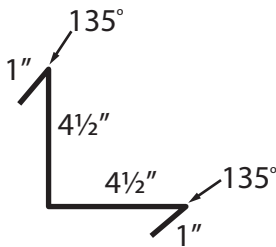


#### O/S Corner Cap

Item #	Girth	Length
FS303	12.75" S.O.	10'0"

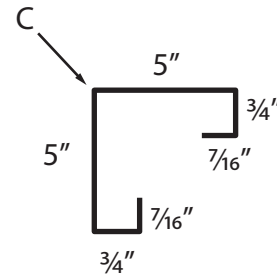


#### J Metal Starter (Any Color) Windows, Man Doors, Garage Doors

Item #	Girth	Length
FS304	6 5/8" S.O.	10'0"

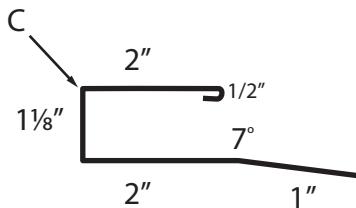

#### J-Metal Cap

Item #	Girth	Length
FS305	5 7/16"	10'0"

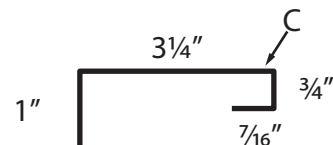


# FLATIRON STEEL

## FLASHING DETAILS - BOARD & BATTEN

### EXPOSED FASTENER AND RIVETED TRIMS


#### Inside Corner (Consealed - Riveted)

Item #	Girth	Length
FS308	9" S.O.	10'0"

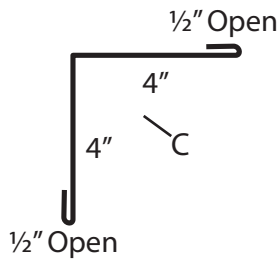


#### Outside Corner (Consealed - Riveted)

Item #	Girth	Length
FS309	9" S.O.	10'0"

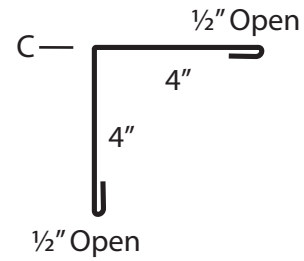


#### Standard Z Trim

Item #	Girth	Length
FS310	3" S.O.	10'0"




#### Standard J Trim

Item #	Girth	Length
FS311	5 1/2" S.O.	10'0"

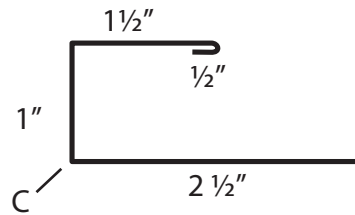


#### Base Trim

Item #	Girth	Length
FS306	4 1/4" S.O.	10'0"



#### Square Base

Item #	Girth	Length
FS307	5" S.O.	10'0"




# FLATIRON STEEL

## FLASHING DETAILS - BOARD & BATTEN


### Outside Corner (Exposed)

Item #	Girth	Length
FS312	12 5/8" S.O.	10'0"




### Inside Corner (Exposed)

Item #	Girth	Length
FS313	12 5/8" S.O.	10'0"




### Z - Base Trim

Item #	Girth	Length
FS314	5 1/8" S.O.	10'0"




### Z - Flashing

Item #	Girth	Length
FS315	4 3/8" S.O.	10'0"



### Overhead Door Trim

Item #	Girth	Length
FS316	13" S.O.	10'0"

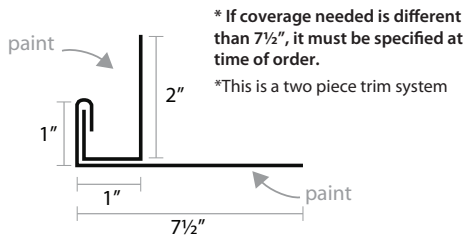



Roofing ▪ Siding ▪ Manufacturer ▪ Supplier

11500 21st Street | Greeley, Colorado 80634 | 970.284.6306  
7885 Red Granite Loop | Colorado Springs, Colorado 80939 | 719.591.1114

[www.FLATIRONSTEEL.com](http://www.FLATIRONSTEEL.com)

2023